



WFR HYBRID FIBER TERMINATION BOX

WFR-HFT

UNIVERSAL HYBRID FIBER TERMINATION UNIT FOR WIFI ACCESS POINTS, PTZ CAMERAS, FIXED CAMERAS, REMOTE PHONE/RADIO INTEGRATION, AND SCADA SYSTEM CONNECTIVITY

FEATURES & BENEFITS

- Hybrid Fiber Termination (HFT) Point from WFR-HFO
- 316 Stainless Steel NEMA Type 4X Rated Box
- IP 68 Rated Connections
- Pre-configured and Tested Prior to Shipping
- Support IP Cameras and Access Points
- Remote Connections to SCADA Systems
- Simplified Wayside Connectivity to Interlockings
- Remote PTZ Connectivity
- Long Distance WiFi Deployment

HIGH OR LOW
POWER OUTPUT
w/12/48/52V
DC OUTPUT


SINGLE OR DUAL
FIBER OPTION

SINGLEMODE OR
MULTIMODE
FIBER OPTION



HFT BOX SPECIFICATIONS

- Dimensions : H6.00"/152mm x W6.00"/152mm x D4.00"/101mm
- Estimated Ship Weight : 5.00lbs/2.27kg

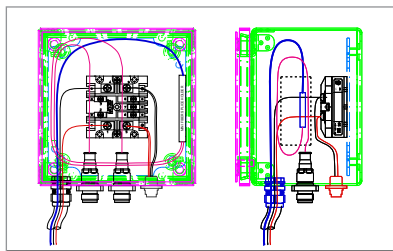

Terminates variable distance hybrid fiber cables of different types to support a myriad of communication systems which have low voltage power requirements and utilizes ethernet as a communication medium.

OPTIONAL ACCESSORIES

- Custom keyed stainless IP68 rated 1 meter plug, high shock, vibration and mechanical resistance with tactical fiber jacket
- Male cordset, straight, AWG 16, 2 meter PUR cable
- Male cordset, right-angle, AWG 16, 2 meter PUR cable
- Male cable connector, screw-termination, cable outlet 6-9.5mm



ODC-2 1m
Fiber Plug



2m DC Power
Straight



2m DC Power
Right Angle



DC Power Field
Termination

WFR	HFT	OPTIONS
HFT 1/2	PORT	12V/SM/MM
HFT 1/2	PORT	52V/SM/MM
HFT 1/2	PORT	COMBO 12/52V/SM/MM
HFT 2	PORT	802.3 AT/AF POE/SM/MM

